


## 2XSL(St)CH-J 0.6/1 kV EMV

XLPE/FRNC motor power supply cable, halogen-free, screened

### DESIGN

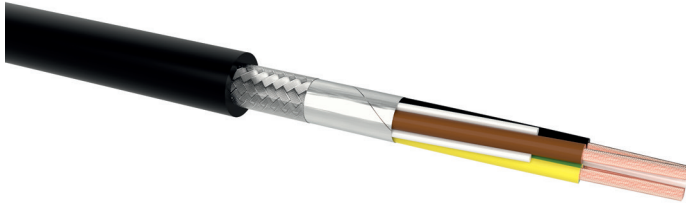

- 1 | Bare copper conductors, fine wires class 5 according to DIN EN 60228 / VDE 0295 / IEC 60228
- 2 | Core insulation of cross-linked polyethylene (XLPE)
- 3 | Cores are stranded together with optimal lay-length
- 4 | Plastic bonded aluminium tape and tinned copper wire braiding
- 5 | Outer sheath of special flame retardant non-corrosive compound (FRNC), colour: black (RAL 9005)

### APPLICATION

These double screened 2XSL(St)CH-J cables were designed as supply and connecting cables, for medium mechanical stress, for fixed installation and occasionally non-guided movements, in dry and damp rooms, especially where human life or valuable property are exposed to a high risk of fire hazards. Double screening considerably improves electromagnetic compatibility (EMC) in buildings and plants.

### TECHNICAL DATA



**Standard:**  
DIN VDE 0276-603



**Rated voltage:**  
0.6/1 kV (U<sub>0</sub>/U)



**Test voltage:**  
core / core 4000 V / 50 Hz



**Temperature range:**  
fixed installation: -30 °C up to 80 °C  
flexible use: -5 °C up to 70 °C  
conductor temperature: max. 90 °C



**Bending radius (min.):**  
fixed installation: 7.5 x Ø of cable  
flexible use: 15 x Ø of cable



**Core identification:**  
colours according to CENELEC HD 308 S2



**Fire properties:**  
EN 60332-1-2: self-extinguishing and flame retardant  
EN 60332-3-24 (Category C): reduced flame propagation  
EN 61034: smoke density  
EN 60754: halogen-free  
CPR classification: D<sub>ca</sub>

Number of cores x nominal cross-section (mm <sup>2</sup> )	Outer diameter (mm) appr.	Cu-value (kg/km)	Total weight (kg/km) appr.
<b>2XSL(St)CH-J 0.6/1 kV EMV</b>			
4 G 1.5	10.6	95	244
4 G 2.5	12.3	150	318
4 G 4	14.0	235	513
4 G 6	16.1	320	670
4 G 10	19.7	533	914
4 G 16	23.0	789	1367
4 G 25	27.3	1236	1970
4 G 35	30.3	1662	2763
4 G 50	35.0	2345	3126
4 G 70	40.0	3196	4182
4 G 95	45.0	4316	5725

Technical changes reserved. All figures are therefore without guarantee.

14.1.2022, 11:19