


## 2XSL(St)CYK-J 0.6/1 kV EMV-3 PLUS

XLPE/PVC motor power supply cable, screened

### DESIGN

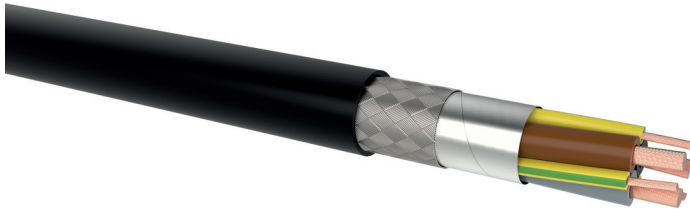

- 1 | Bare copper conductors, fine wires class 5 according to DIN EN 60228 / VDE 0295 / IEC 60228
- 2 | Core insulation of cross-linked polyethylene (XLPE)
- 3 | Cores are stranded together with optimal lay-length
- 4 | Plastic bonded aluminium tape and tinned copper wire braiding
- 5 | Outer sheath of special compound of polyvinyl chloride (PVC), colour: black (RAL 9005) for 2XSL(St)CYK-J or transparent for 2XSL(St)CY-J

### APPLICATION

2XSL(St)CYK-J double screened motor supply and frequency converter cables were designed as supply and connecting cables for medium mechanical stress, fixed installation and non-guided movements in dry, damp and wet rooms. Black UV-resistant version is designed for outdoor applications. XLPE insulation improves transmission characteristics and allows transmission of higher power when using same cross sections.

### TECHNICAL DATA



**Standard:**  
DIN VDE 0276-603



**Rated voltage:**  
0.6/1 kV (U<sub>0</sub>/U)



**Test voltage:**  
core / core 4000 V / 50 Hz



**Temperature range:**  
fixed installation: -30 °C up to 80 °C  
flexible use: -5 °C up to 70 °C  
conductor temperature: max. 90 °C



**Bending radius (min.):**  
fixed installation: 5 x Ø of cable  
flexible use: 15 x Ø of cable



**Core identification:**  
colours according to CENELEC HD 308 S2



**Fire properties:**  
EN 60332-1-2: self-extinguishing and flame retardant  
CPR classification: E<sub>ca</sub>

Number of cores x nominal cross-section (mm <sup>2</sup> )	Outer diameter (mm) appr.	Cu-value (kg/km)	Total weight (kg/km) appr.
<b>2XSL(St)CYK-J 0.6/1 kV EMV-3 PLUS</b>			
3 x 1.5 + 3 G 0.25	10.2	91	212
3 x 2.5 + 3 G 0.5	11.8	152	276
3 x 4 + 3 G 0.75	13.4	224	446
3 x 6 + 3 G 1	15.3	298	582
3 x 10 + 3 G 1.5	18.6	491	794
3 x 16 + 3 G 2.5	21.5	723	1188
3 x 25 + 3 G 4	25.5	1138	1713
3 x 35 + 3 G 6	28.3	1535	2402
3 x 50 + 3 G 10	33.0	2208	2718
3 x 70 + 3 G 10	37.0	2871	3636
3 x 95 + 3 G 16	41.0	3953	4978
3 x 120 + 3 G 16	43.8	4836	5077

Technical changes reserved. All figures are therefore without guarantee.

14.1.2022, 11:18