


# 9YSL(St)CY-J 0.6/1 kV EMV UL/c(UL)

UL recognized PP/PVC motor power supply cable, screened

## DESIGN

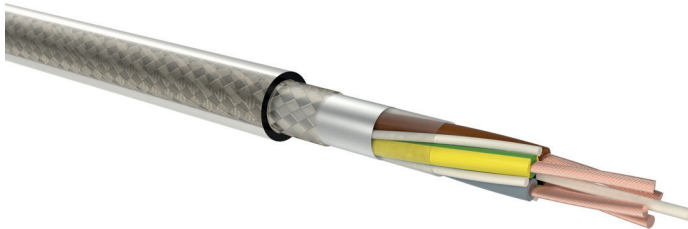

- 1 | Bare copper conductors, fine wires class 5 according to DIN EN 60228 / VDE 0295 / IEC 60228
- 2 | Core insulation of polypropylene compound (PP)
- 3 | Cores are stranded together with optimal lay-length
- 4 | Plastic tape separation (optional)
- 5 | Plastic bonded aluminium tape and tinned copper wire braiding
- 6 | Outer sheath of special compound of polyvinyl chloride (PVC), colour: black (RAL 9005) for 9YSL(St)CYK-J or transparent for 9YSL(St)CY-J

## APPLICATION

Double screened flexible motor supply cables with special EMC-performance, with low capacitance design and PVC sheath. Contrary to usage of PVC insulated cables, PP insulated cables show significant reduction of useless reactive power always needed for charging and discharging the cable during operating of the frequency converter.

## TECHNICAL DATA



**Standard:**  
DIN VDE 0276-603



**Rated voltage:**  
0.6/1 kV (U<sub>0</sub>/U)  
1000 V (UL/CSA)



**Test voltage:**  
core / core                      4000 V / 50 Hz



**Temperature range:**  
fixed installation:            -40 °C up to 80 °C  
flexible use:                    -5 °C up to 80 °C  
conductor temperature:    max. 80 °C



**Bending radius (min.):**  
fixed installation:            4 x Ø of cable  
flexible use:                    15 x Ø of cable



**Core identification:**  
colours according to CENELEC HD 308 S2



**Fire properties:**  
EN 60332-1-2: self-extinguishing and flame retardant  
UL: vertical flame test VW-1, cable flame test  
CSA: FT1



**Certificate:**  
UL AWM Style 2570  
CSA C22.2 No. 210-11, AWM

Number of cores x nominal cross-section (mm <sup>2</sup> )	Outer diameter (mm) appr.	Cu-value (kg/km)	Total weight (kg/km) appr.
<b>9YSL(St)CY-J 0.6/1 kV EMV UL/c(UL)</b>			
4 G 1.5	10.5	87	151
4 G 2.5	11.8	133	207
4 G 4	13.3	213	272
4 G 6	14.9	298	371
4 G 10	17.7	460	557
4 G 16	21.5	707	1218
4 G 25	26.3	1100	1367
4 G 35	29.7	1542	1763
4 G 50	35.8	2206	2318
4 G 70	40.9	3002	3253
4 G 95	44.6	4004	4201

Technical changes reserved. All figures are therefore without guarantee.

14.1.2022, 11:27