


FLEXICS® CHAIN 99111C

PP/PUR drag chain cable, screened

DESIGN

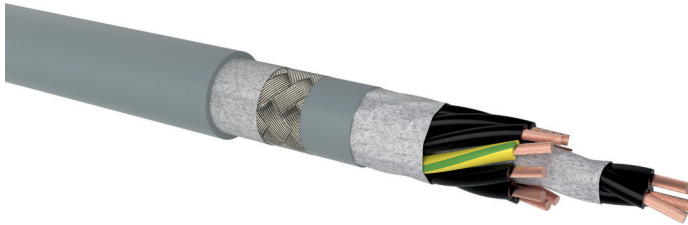

- 1 | Bare copper conductors, super fine wires class 6 according to DIN EN 60228 / VDE 0295 / IEC 60228
- 2 | Core insulation of polypropylene compound (PP)
- 3 | Cores stranded in layers with short lay-lengths
- 4 | Non-woven wrapping over each stranding layer
- 5 | Inner sheath of thermoplastic elastomer compound (TPE)
- 6 | Tinned copper wire braiding
- 7 | Non-woven wrapping over braiding
- 8 | Special polyurethane (PUR) outer sheath, colour: grey (RAL 7001)

APPLICATION

Extremely flexible PP/PUR control cable for transmission of instrumentation and control signals for machine building and plant construction purposes, especially for continuous moving machine parts, e.g. within C-tracks. FLEXICS® CHAIN 99111C cables are designed for both indoor and outdoor applications when exposed to high mechanical stress. Resistant against a wide range of oils, greases, coolants and lubricants.

TECHNICAL DATA



Standard:
based on VDE 0285



Rated voltage:
300/500 V (U_o/U)



Test voltage:
core / core 4000 V / 50 Hz



Temperature range:
fixed installation: -50 °C up to 80 °C
flexible use: -30 °C up to 80 °C



Bending radius (min.):
fixed installation: 5 x Ø of cable
flexible use: 7.5 x Ø of cable



Core identification:
black (continuously numbered), from 3 cores with green/yellow ground conductor



Fire properties:
EN 60332-1-2: self-extinguishing and flame retardant



Bending cycles:
5 million
for detailed application in drag chains see "General Technical Information" section

Number of cores x nominal cross-section (mm ²)	Outer diameter (mm) appr.	Cu-value (kg/km)	Total weight (kg/km) appr.
FLEXICS® CHAIN 99111C			
3 G 0.5	7.3	39	79
4 G 0.5	7.9	46	94
5 G 0.5	8.5	54	105
7 G 0.5	9.8	70	138
12 G 0.5	11.5	100	192
18 G 0.5	13.4	153	282
25 G 0.5	15.9	202	386
2 x 0.75	7.3	39	80
3 G 0.75	7.8	48	91
4 G 0.75	8.4	59	112
5 G 0.75	9.0	69	124
7 G 0.75	10.7	90	166
12 G 0.75	12.5	129	251
18 G 0.75	14.9	205	352
25 G 0.75	17.4	271	470

FLEXICS® CHAIN 99111C

PP/PUR drag chain cable, screened

Number of cores x nominal cross-section (mm ²)	Outer diameter (mm) appr.	Cu-value (kg/km)	Total weight (kg/km) appr.
FLEXICS® CHAIN 99111C			
2 x 1	7.7	46	92
3 G 1	8.2	57	101
4 G 1	8.9	70	129
5 G 1	9.8	81	152
7 G 1	11.4	110	196
12 G 1	13.4	182	298
18 G 1	16.1	254	426
25 G 1	18.8	365	585
36 G 1	24.3	516	895
41 G 1	26.1	610	1032
50 G 1	28.4	690	1160
65 G 1	32.2	852	1660
2 x 1.5	8.4	58	112
3 G 1.5	9.0	75	133
4 G 1.5	9.9	91	160
5 G 1.5	10.9	112	188
7 G 1.5	12.7	145	251
12 G 1.5	15.2	247	377
18 G 1.5	17.8	348	534
25 G 1.5	21.2	498	768
36 G 1.5	26.4	702	1210
42 G 1.5	28.4	829	1441
50 G 1.5	31.2	1025	1709
3 G 2.5	11.0	119	196
4 G 2.5	11.9	161	233
5 G 2.5	13.2	194	293
7 G 2.5	15.8	262	399
12 G 2.5	20.4	410	582
18 G 2.5	24.0	562	989
25 G 2.5	28.2	778	1382
4 G 4	13.7	238	348
5 G 4	15.3	280	420
7 G 4	20.0	352	651
4 G 6	16.1	318	499
7 G 6	23.0	528	844
4 G 10	22.5	485	1052
5 G 10	24.7	610	1096
7 G 10	29.3	820	1530
4 G 16	25.7	840	1386
5 G 16	28.2	1050	1759